

SGTM16-UW

Ultra Low Power Timing Module for Underwater

PRODUCT OVERVIEW


SGTM16-UW is the least consuming precision clock module of Syrlinks. It uses a 50mW 16.384 EWOS and the SGTM16 can be used as a PPS time keeper in all highly battery-constraint underwater systems. The Module will automatically adjust the OCXO frequency and phase to the external PPS reference (under GNSS) with an record high precision at 10-11 level (0,02ppb). Once locked, it can be deployed in GNSS-denied environment (underwater) and will keep a precise synchronization in free-running mode for the embedded electronics. SGTM16 is ideal to reduce battery size and extend underwater mission time. Its thermal sensitivity is about ± 30 ppb but can be improved down to ± 2 ppb thanks to a specific firmware on demand.




KEY FEATURES

- 16,384 MHz HCMOS output
- 30 ppb typ. non-compensated or ± 2 ppb (typ.) thermal sensitivity
- 65 mW at 25°C (typ.)
- ± 2 ppb/day after 30 days (typ.)
- Pin-to-pin compatible replacement of Chip Scale Atomic Clock

DIMENSIONS & PIN-OUT

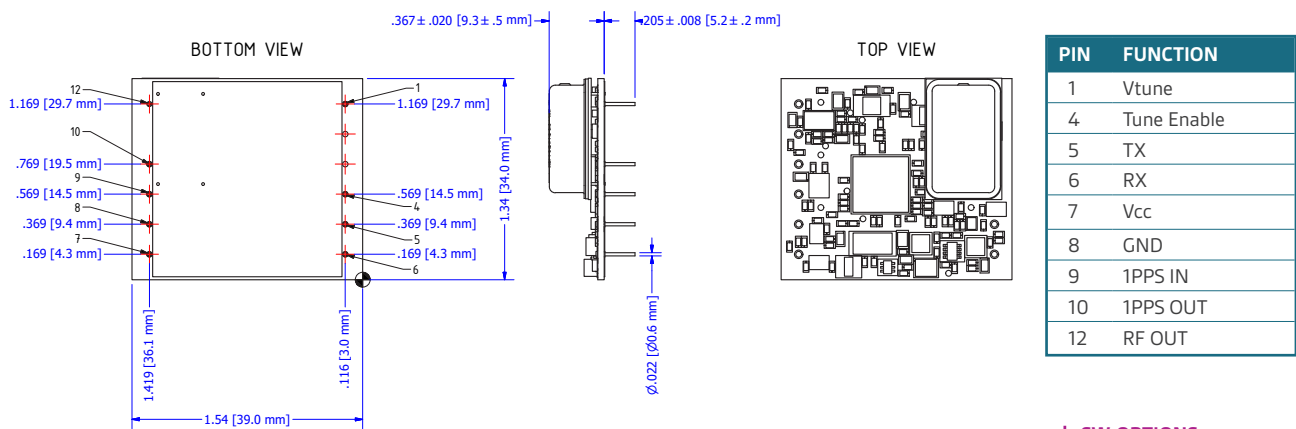

ORDERING INFORMATION

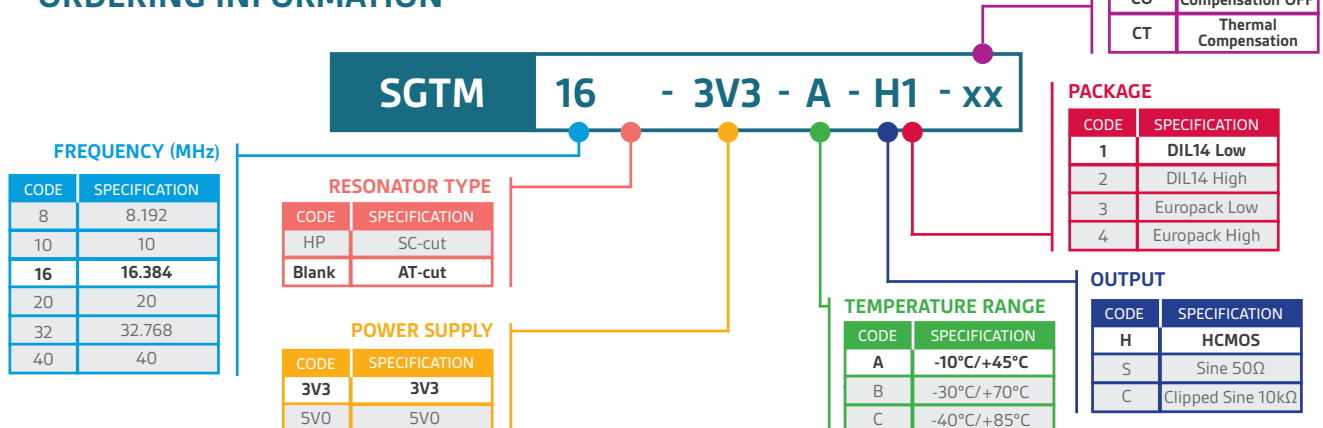

ELECTRICAL CHARACTERISTICS

PARAMETERS	Unit	Min	Typ.	Max	Note	Comments
Output Frequency	MHz		16.384		1	
Temperature Range						
• Operating	°C	-10		+45		Stay functional at +50°C but stability may not be met
• Storage	°C	-55		+95		
Supply Voltage	V	3.15	3.3	3.45		±5% or 5V on request
Supply Current						
• Warm-up	mA			230	3	During 10s max @ 25°C / 20s max @ 5°C
• Steady state / -10°C	mA		38	43	1	
• Steady state / +5°C	mA		27	32	1	
• Steady state / +25°C	mA		20	25	1	
• Steady state / +45°C	mA		10	15	1	
Frequency Stability						
• Initial frequency accuracy	ppm		±0.5	±1	1	+25°C referred to nominal frequency
• Vs operating temperature range	ppb		±30	±50	1	Forced airflow environment
• Vs supply voltage variation	ppm		±0.1	±0.2	2	3.3V ± 5%
• Vs load	ppm		±0.1	±0.2	2	(10kΩ // 15 pF load ±10%)
• Short-term (τ=0.1s)	10 ⁻¹¹		2	10	2	Allan deviation @ 16.384 MHz
• Short-term (τ=1s)	10 ⁻¹¹		3	10	2	
• Aging						
Per day	ppb		±2	±5	2	After 30 days
First year	ppm			±1	2	
After 10 years	ppm			±5	2	
• Acceleration sensitivity	ppb/G		±1		2	Worst direction
• Warm-Up Time	sec			10	3	to ± 1 ppm of final frequency (1 hour) at 25°C
	sec			60	3	to ± 100 ppb of final frequency (1 hour) at 25°C
• Retrace	ppb			±10	3	24h work after 24 off
RF Output Level						
• Load	pF		15		3	1 MΩ
• Signal Level - Vh	V	2.4			3	
• Signal Level - Vl	V			0.4	3	
• Rise \ Fall Time	ns			8	3	10% - 80%
• Duty Cycle	%	45		55	3	
1 PPS Output Parameters						
• Load	pF		10		3	1 MΩ
• Rise \ Fall Time	ns			8	3	10% - 80%
• Signal Level - Vh	V	2.4			3	
• Signal Level - Vl	V			0.4	3	
• Level	V	0		Vcc	3	
1 PPS Input Parameters						
• Format			Rising edge			
• Load	MΩ		1		3	
• Logic low level	V	< 0.4			3	
• Logic high level	V			2.4 to Vcc	3	
Serial Communications						
• Protocol			RS-232			
• Format	V	0		Vcc		CMOS
• Baud Rate			57600		3	
1 PPS accuracy 1σ	ns		±32			
Hold over stability	μs	±100		±600		over 24h (at +25°C)
Weight	grams		10			

Notes

1. Parameter inspected at 100% | 2. Parameter inspected by sampling | 3. Parameter guaranteed by design and characterization

ENVIRONMENTAL CONDITIONS

Soldering instructions	Hand soldering only, with recommended pins soldering temperature : 235°C ±5°C, t=10s ±0.5s (260°C max for 5s max) Reflow soldering and other soldering methods are prohibited
Mounting instructions	Pin receptacles mounted into PCB can be used. Reference example : 0338-0-15-XX-15-XX-10-0
PCB cleaning/washing	Not washable

OCXO HERMETICITY

Metallic housing hermetically sealed
Fine Leaks and Gross Leaks tests performed 100%